

Adjusting Volume on Lucky Duck Game

To adjust the volume on the Lucky Duck game you will need a #1 (small) phillips head screw driver and the key to get into the access panel of the game.

1. Insert the key into the lock on the back access panel of the game and turn it clockwise to open.
2. Carefully pull out the drawer that the main logic board is installed on.




Drawer


Main Logic Board

Be careful when pulling out the drawer that you do not pull too hard or too fast. That could damage the harnessing on the game.

The amplifier is located underneath the drawer on the bottom side. You may need to pull out the drawer housing assembly to see it clearly.

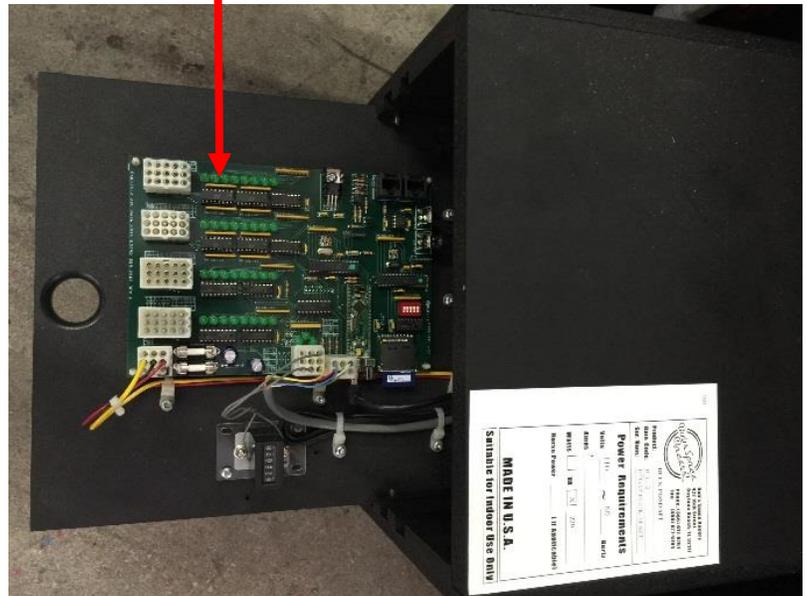

3. Once you have located the amplifier, look on the side where the RCA cables are and you will see a port to insert a #1 phillips head screwdriver. It looks very similar to a plus (+) sign.
4. Gently turn the screw clockwise to increase the volume.
 - a. Note: there are 2 channels on the amplifier, make sure you are adjusting the correct channel.
 - b. The channels are labelled LEFT and RIGHT.

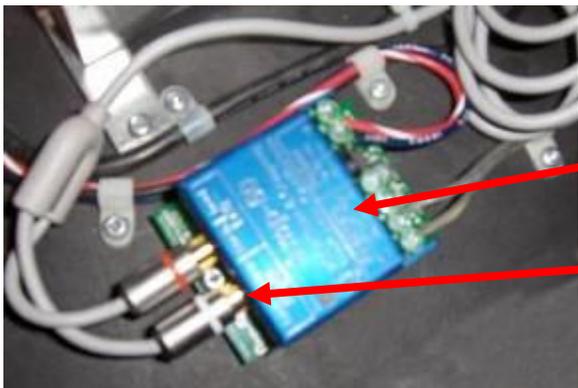

Amplifier

RCA input cables