



Short Range Basketball

GAME ASSEMBLY INSTRUCTIONS



Bob's Space Racers, Inc.

427 15th Street

Daytona Beach, FL 32117

Tel: (386) 677-0761

Fax: (386) 677-0794

Model View



(4 Player Unit Shown Here)

TOOLS NEEDED:


- ⤴ Ratchet and 7/16 Socket
- ⤴ 7/16 Open end wrench
- ⤴ Box cutter (for opening packaging)

ASSEMBLY:

- ⤴ Start by taking the parts off the pallet and group them together by type (example: side rails, basket ball nets, etc).
- ⤴ Carefully cut open the packaging trying not to scratch the parts.
- ⤴ Find the 2 large back plates and lay them side by side and prop them up on something to keep them off of the ground. (Example would be a sawhorse)
 - You will notice that one side has a tab that slides under the other side.



- ⤴ Using the 1/4" x 3" ALL-THREADED bolts, secure the 2 back panels together using the inside holes from top to bottom.


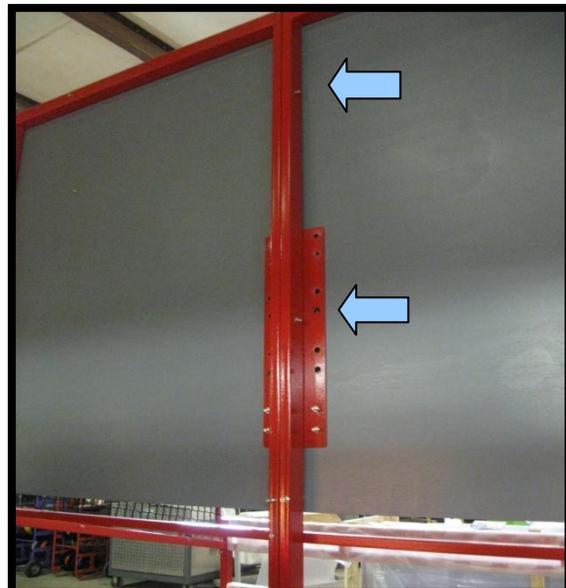


▲ Now find the top left and top right side supports and fasten them to the back panel using the 3/8"x3" Hex bolts and nuts.



Only secure the top rails on both sides

Notice the rail has indentation to identify which rails go where.

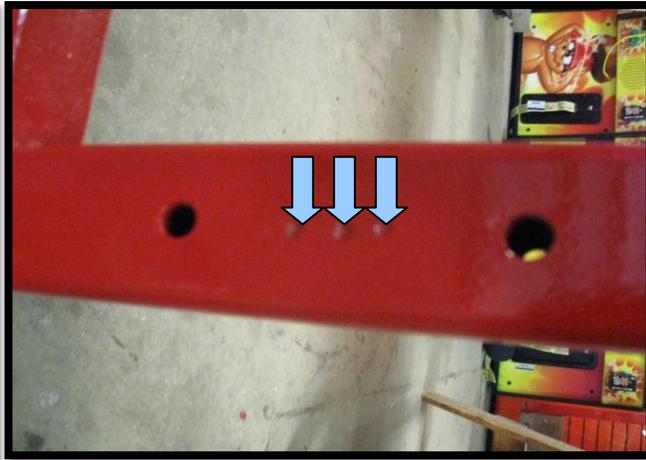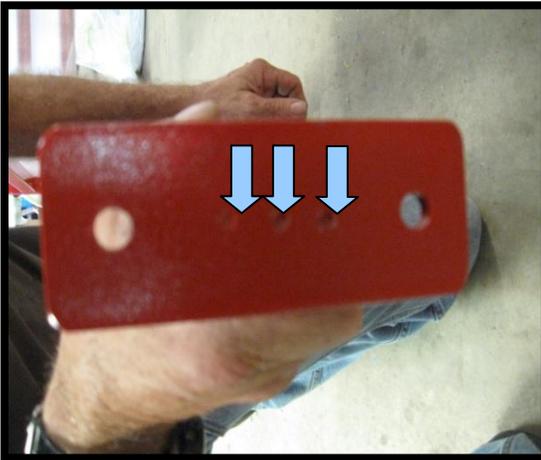

- ▲ Now stand the back board up.
 - Locate the front counter support rail and attach the backboard to the counter support rail.
 - Attach remaining side rails.




- ▲ Now install the feet
 - set the height by using the alignment holes that are pre-drilled in the feet.




Locate the rear canvas rail and the backboard stabilizing support rail and attach to the backboard assembly using the 1/4"x3 1/2" hex bolts and nuts.



- ▲ Now, attach the "Hot Shot" Marquee display
 - Use the 1/4"x4" for the top
 - Use the 1/4"x2" for the bottom

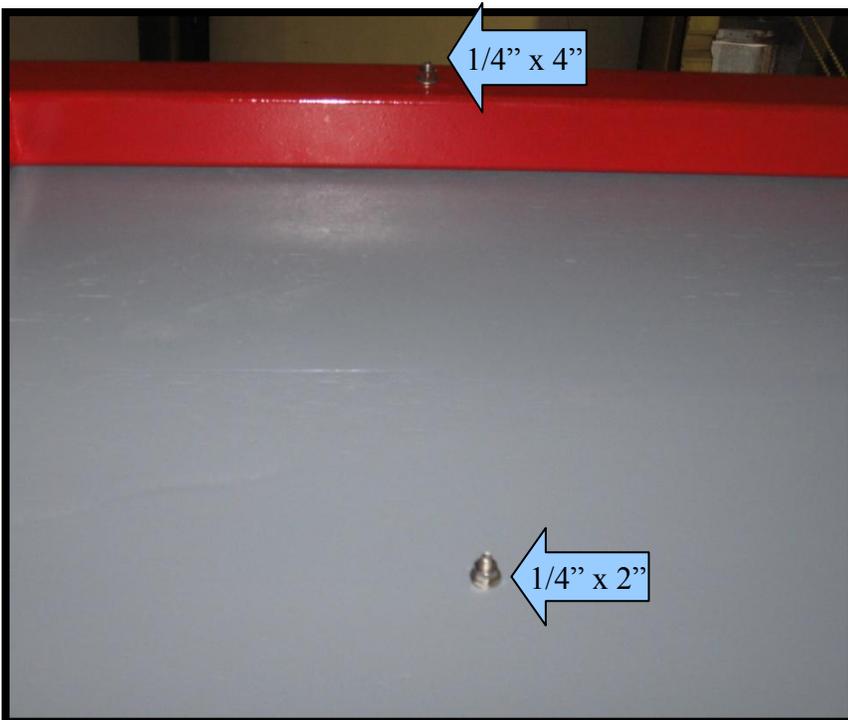


- ⤴ After the marquee is attached, using the 3/8"x3" bolts, secure the basket ball backboard and net assemblies

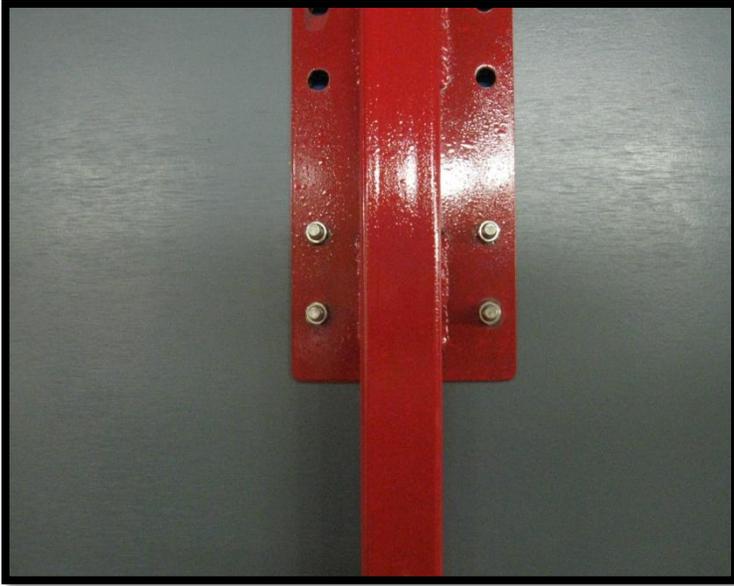

You can use any of the holes to set the basket as high/low as you want



- ⤴ Locate the side nets and install them using the 1/4"x3" bolts and nuts

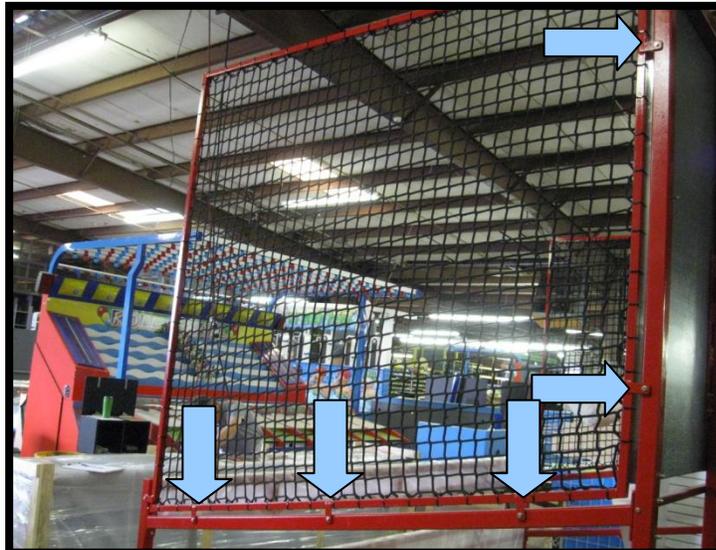

Using the supplied wire tie supports and rope, you can choose whether or not to install the canvas bottom. Simply secure the canvas to the canvas rods using the wire ties. Run them through the eye-lets and then wrap the rope around the canvas rod and into each eye-let.

Now locate the front counter and remove it from the pallet. You will see some Anchor bolts holding the counter down to the pallet.



Now slide the counter up against the canvas rail.

Your HOT SHOT™ game is now installed and ready for use!

CALLING FOR SERVICE

1. When calling for service, please check the service manual first. Many times the answer to your problem has been addressed in this documentation.
2. Please make sure you have the serial number of the game ready when you call.
3. If this is a repeat call, please tell the service technician that you have made a previous call regarding this problem. This way we will be able to retrieve the history on your game allowing us to serve you better and save you time.
4. Please retain proof of purchase for your product. This might be requested for warranty repairs.
5. Please call from the game if possible since we might need you to check certain things on the game while we are on the telephone with you.

**IF YOU HAVE ANY QUESTIONS OR COMMENTS, PLEASE CALL OUR SERVICE
DEPARTMENT AT**

(386) 677-0761

(MONDAY – FRIDAY, 8:30AM – 5:00PM EST, EXCLUDING HOLIDAYS)

(or)

EMAIL QUESTIONS TO: Tech@BobsSpaceRacers.com

(or)

VISIT THE “CUSTOMER SUPPORT” SECTION ON OUR WEBSITE:

WWW.BOBSPACERACERS.COM